

# L HEAD SPECIFICATION GUIDE

L Heads can be ordered as remotes only or can be ordered mounted on the Tufflite S&H Series of emergency lights. Constructed of high impact thermoplastic the L heads are available as single or double remotes, and can be configured for weatherproof and shatter resistant applications.





## Construction

- Constructed of high impact thermoplastic and available in white standard or black to order
- Available as single or double remotes
- Wide selection of lamps available in 6, 12, or 24 volt DC
- Unique locking collar locks the PAR36 lens in place and provides for easy lamp replacement
- Swivel is mechanically adjustable and locks in place
- Can be configured for weatherproof or shatter resistant applications



## L Remote Head Dimensions

| Model    | A      | B    | C       | D      | E    |
|----------|--------|------|---------|--------|------|
| L SINGLE | 5-7/8" | 7.0" | 4-3/4"  | 3-5/8" | 5.0" |
| L DOUBLE | 5-7/8" | 7.0" | 11-1/2" | 3-5/8" | 5.0" |

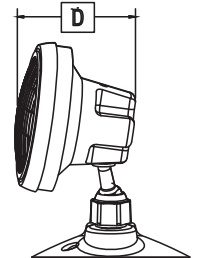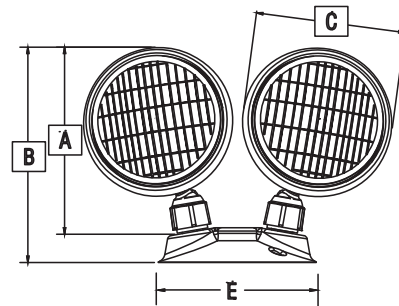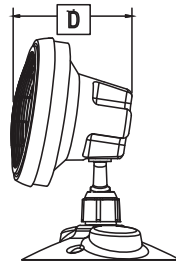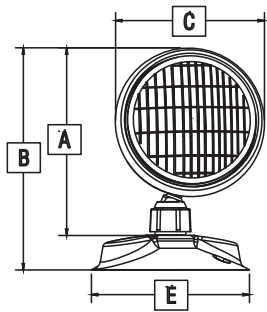

## ORDERING GUIDE – L

Example: L-C67-1-WP

| Model | Lamp Selection                                  |   |   | No. of Heads                       | Options  |
|-------|---|---|---|------------------------------------|--|
|       | 6 Volt  | 12 Volt   | 24 Volt   |                                    |  |
| L     | <b>W67</b> 6 Volt 7 Watt<br>Wedge Base Tungsten | <b>W129</b> 12 Volt 9 Watt<br>Wedge Base Tungsten   | <b>W249</b> 24 Volt 9 Watt<br>Wedge Base Tungsten   | 1 Single Remote<br>2 Double Remote | <b>WP</b> Weatherproof<br><b>SR</b> Shatter Resistant Coating<br><b>B</b> Black Finish |
|       | <b>W69</b> 6 Volt 9 Watt<br>Wedge Base Tungsten | <b>W1212</b> 12 Volt 12 Watt<br>Wedge Base Tungsten | <b>W2418</b> 24 Volt 18 Watt<br>Wedge Base Tungsten |                                    |  |
|       | <b>C612</b> 6 Volt 12 Watt<br>Capsule Halogen   | <b>W1218</b> 12 Volt 18 Watt<br>Wedge Base Tungsten | <b>W2425</b> 24 Volt 25 Watt<br>Wedge Base Tungsten |                                    |  |
|       | <b>C620</b> 6 Volt 20 Watt<br>Capsule Halogen   | <b>C1212</b> 12 Volt 12 Watt<br>Capsule Halogen     | <b>C2412</b> 24 Volt 12 Watt<br>Capsule Halogen     |                                    |  |
|       |   | <b>C1220</b> 12 Volt 20 Watt<br>Capsule Halogen     | <b>C2420</b> 24 Volt 20 Watt<br>Capsule Halogen     |                                    |  |
|       |   | <b>C1255</b> 12 Volt 55 Watt<br>Capsule Halogen     | <b>C2450</b> 24 Volt 55 Watt<br>Capsule Halogen     |                                    |  |
|       |   |   |   |                                    |  |
|       |   |   |   |                                    |  |
|       |   |   |   |                                    |  |
|       |   |   |   |                                    |  |
| L     |   |   |   |                                    |  |

Fill in fields from categories above and complete type and part

Type Number:

Full Part Number: