



EVENLITE


LIFE SAFETY LIGHTING SOLUTIONS

PROJECT NAME:	APPROVED BY:
CATALOG NO:	TYPE NO:

MIRRORLITE - MIR-SD Applications Guide

Recessed Emergency Light

Ceiling Mount Applications

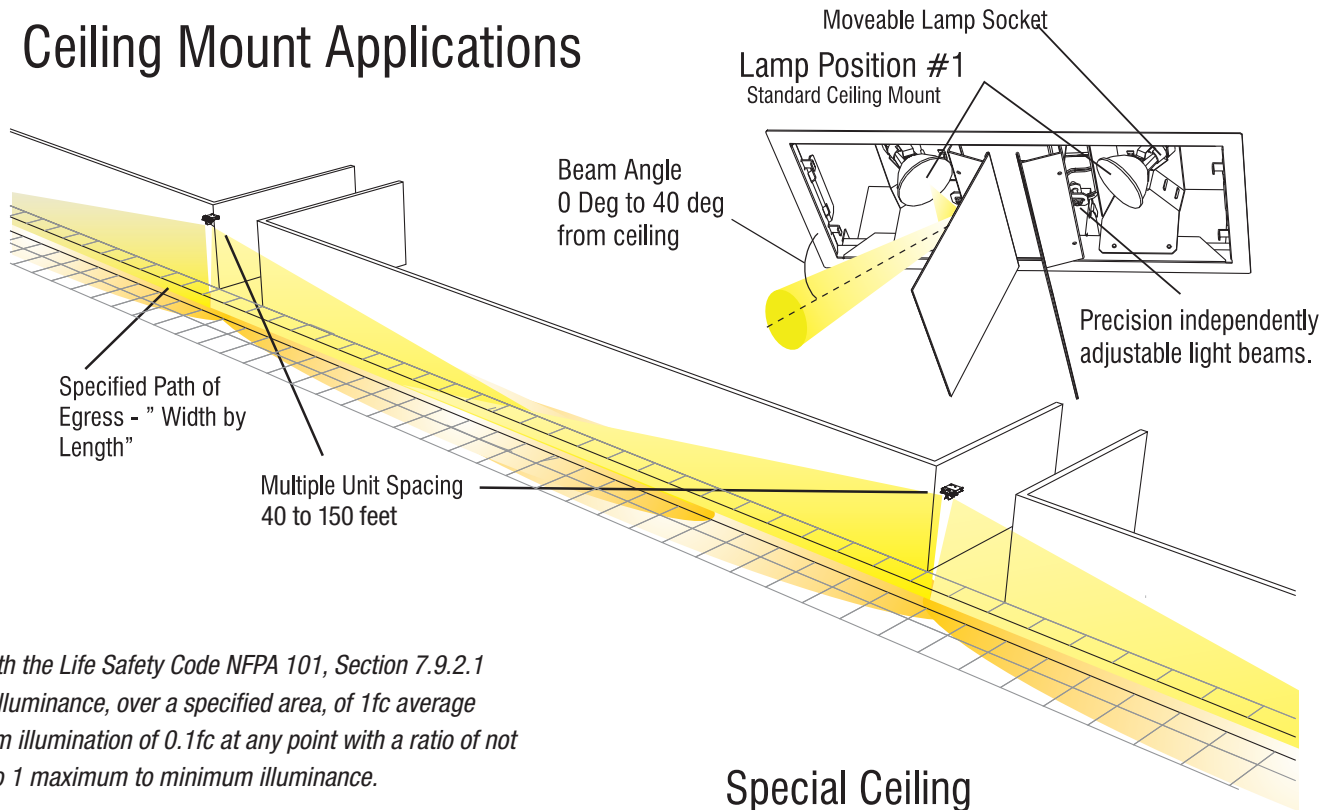


Compliance with the Life Safety Code NFPA 101, Section 7.9.2.1 requires even illuminance, over a specified area, of 1fc average with a minimum illumination of 0.1fc at any point with a ratio of not more than 40 to 1 maximum to minimum illuminance.


To meet this requirement Mirrorlite uses reflected and direct illumination that is matched, in wattage, to the size of the area to be illuminated. Precision independently adjustable light beams allow precise positioning for even coverage.

Special Ceiling Mount Applications

Lamp Position #2 & #3

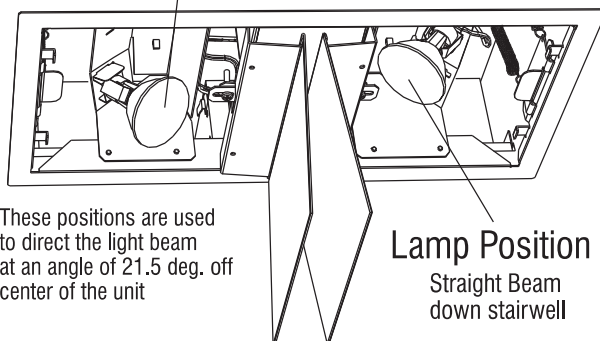

Lamp Position #1 Straight Beam down stairwell

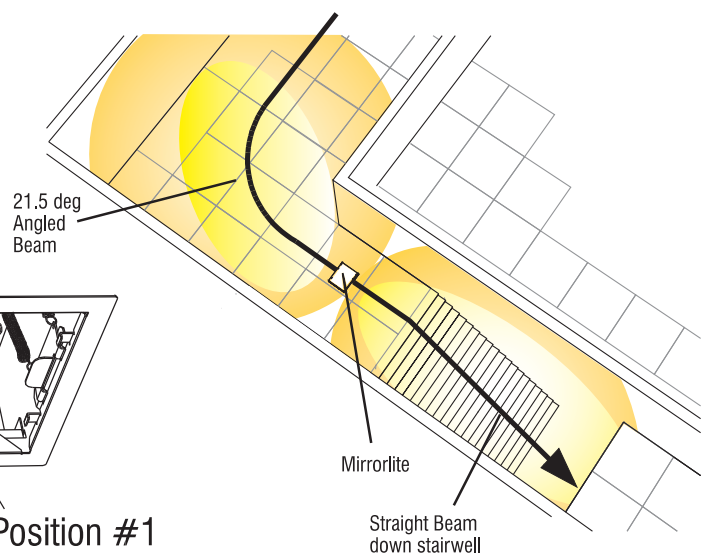

Mirrorlite MIR-SD Recessed Emergency Light

Wall Mount Applications

