

PROJECT NAME:	APPROVED BY:
CATALOG NO:	TYPE NO:

TRER

The TRER edge-lit exit signs feature a clean and traditional look. The indirect LED illumination evenly lights the acrylic face with crisp, even light. The ultra thin face plate virtually disappears once installed, yet the EXIT lettering boldly distinguishes the path of egress.

Construction

- The TRER recessed backbox and trim plate are all constructed from durable 20 gauge steel
- The high clarity acrylic face plate is available in both single face or double face versions, with a clear, white, mirrored
- White, baked powder coat finish is standard on all versions
- External LED monitor light and test switch are standard on self-powered versions
- Ceiling recessed versions are supplied standard with removable steel T-Bar mounting brackets
- Field installable chevrons are standard
- Recessed version trim plates are held securely in place with two (2) torsion spring clips that allow the face plate to accommodate uneven or angled ceilings and walls

Electrical


- The TRER EM is designed with a maintenance free, Nickel-Cadmium battery providing a minimum emergency duration of 90 minutes
- An optional 120 minute Ni-Cad battery is available
- Recharge time of the battery is twenty-four (24) hours
- The maximum battery working temperature is 45°C
- The TRER is configured with high output, high efficiency LEDs
- Standard with 120/277V input
- All LED versions consume 2W or less nominal power
- The charger also has brownout and short circuit protection.
- The TRER EM is designed to operate on battery power in the event of a regular mains power failure
- The TRER EM utilizes a solid state transformer that eliminates the possibility of relay failure due to particle build up on the relay



Meets CT code for 6" Exit with 6" dynamic ISA



Meets the requirements of the State of Massachusetts

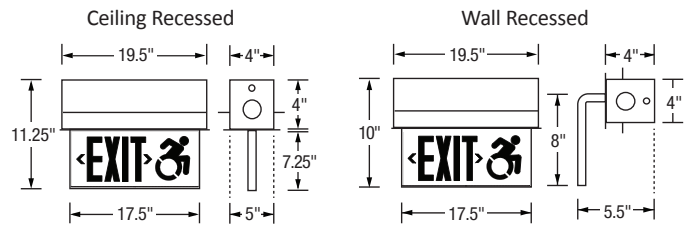

- Status is easily determined via an LED that indicates AC-ON
- A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit

Certification

- CCSA C22.2 No. 141 Performance Certified



Warranty

- The TRER comes with a 3 year limited warranty

ORDERING GUIDE – TRER

Example: TRER-EM-R-1C-RC-BA

Model	Operation	Letter Size/Letter Color	Faces/Background	Mounting	Options
TRER Exit with 6" ISA	AC AC Only 120/277 VAC	R RED Standard 6" EXIT with 6" ISA G GREEN Standard 6" EXIT with 6" ISA	1C Single Face, Clear Background (standard) 1W Single Face, White Background 1M Single Face, Mirrored Background 2M Double Face, Mirror Background 2W Double Face White Background	RC Recessed Ceiling WR Wall Recessed	2H Two Hour Run Time BA Brushed Aluminum Trim Plate MA Massachusetts CT Connecticut
TRER					

Fill in fields from categories above and complete type and part

Type Number:

Full Part Number: