

PROJECT NAME:	APPROVED BY:	
CATALOG NO:	TYPE NO:	

LIFELINE - Self-Luminous LL Series

Custom Graphics

Unique, Non-Electrical Self Luminous Sign internally illuminated by sealed tritium light source rated to 15 year useful life without the need for maintenance. Custom Graphics Stencil illumination with Opaque Background. Lifeline signs are recyclable at the end of the 15 year useful life.

Construction

- Rugged thermoplastic, flame retardant ABS injection molded housing with tamper resistant finishing bezel
- Requires no external light source, electrical power, wiring or batteries
- 12 Year rated service life
- 100% reliable, always on and maintenance free
- Sealed internal construction prevents unauthorized access to light tubes
- NO SERVICEABLE PARTS
- Heavy-duty universal mounting bracket supplied with hardware
- Suitable for wall, ceiling, end mount or optional pendant mounting
- Screen-printed internal legend protected by clear polycarbonate window
- Suitable for clean room applications
- Explosion proof (not a source of ignition)
- Operating temperature -22°F - 149°F

Electrical

- Non-electrical sustained tritium light source

Illumination

- Illuminated area is max. 11.8" x 5.7"
- 520 nm Green light output for maximum visibility up to 50 feet in darkness
- Requires no external light source, electrical power, wiring or batteries

Certification

- Meets requirements of B.S. 5499, Part 2 with minimum .52 cd/m luminance at end of rated life
- Lifeline custom is suitable for use in hazardous atmospheres and damp locations.
- Meets NEC Article 500, Class 1,11 and 111 conditions
- Licensed under state and federal regulations for distribution to General Licensees
- Buy American Act compliant



Warranty

- Limited warranty for the rated service life of the product



Sign above are as they would appear in a darkened environment



Now Available with CTSA option which meets H.B. No. 5050, P.A. no. 16-78

ORDERING GUIDE – LL

Example: LL-1-R-W-PA "Specify Graphics"


Model	Number of Faces	Background Color	Frame Color	Options
LL Lifeline Thermoplastic	1 Single Face 2 Double Face	R Red G Green B Black	W White B Black	VS Polycarbonate Vandal Shield with Torx Head Screws PA 12" Swivel Pendant PB 24" Swivel Pendant PC 36" Swivel Pendant PD 48" Swivel Pendant CTSA 6" "Forward leading symbol of accessibility to meet CT H.B. No. 5050, Public Act No. 16-78
LL				

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number:

Lifeline Custom Graphics Self-Luminous LL Series

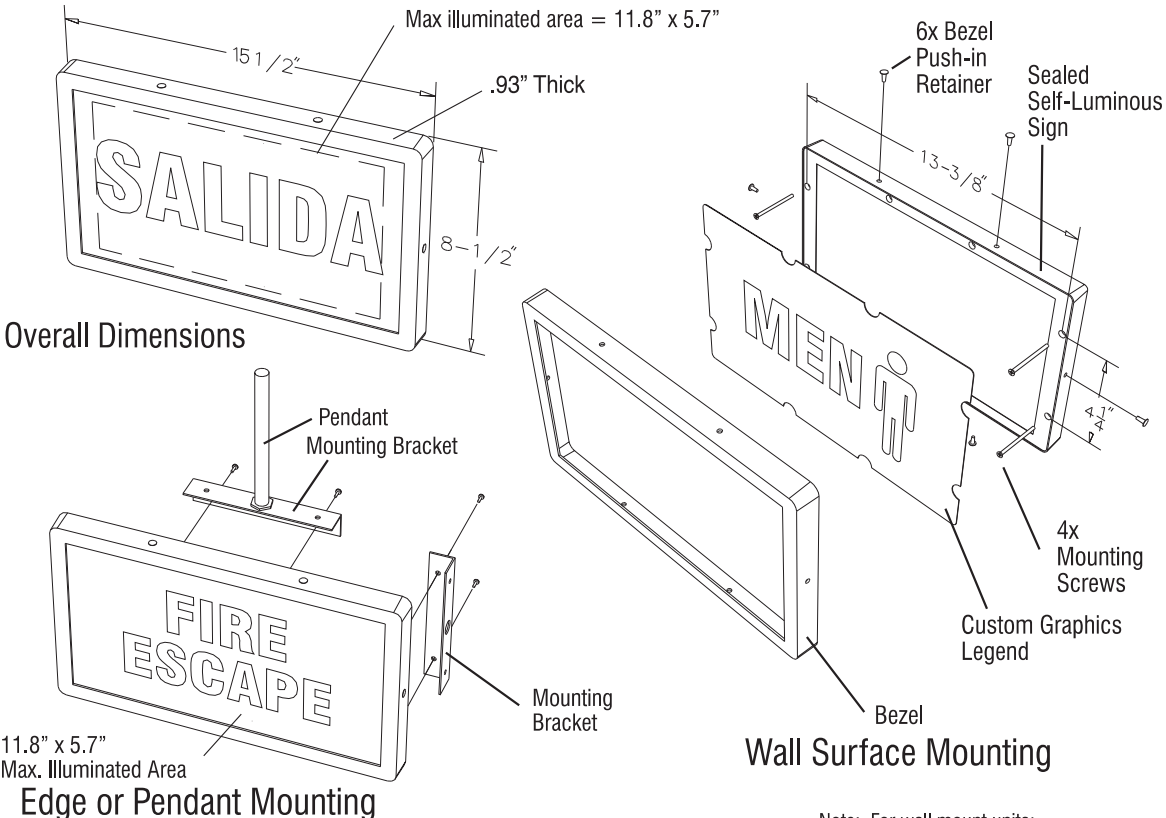

Note: For wall mount units:
Wire Guard available see data sheet WG-VS

