

TUFFLITE NEX-NYC - Wet Location Exit Sign

NEMA 4, 4X, 12 & 13 • 8" Letters Meet NYC Requirements

The NEX-NYC has been designed to perform in damp and wet locations. The entire internal cavity of the sign is protected from moisture ingress by an extremely resilient silicone gasket. The liquid gasketing is "hot-bonded" to the lens during the manufacturing process. This procedure eliminates any chance of the gasketing to become dry and pull away from the lens. The gasketing always holds its original form and has "memory retention" so that it effectively and consistently protects the NEX-NYC from moisture. The NEX-NYC can also be equipped with an optional thermostatically controlled heater for cold environments.



Construction

- Durable Gray fiberglass housing protects from water ingress
- Four (4) polycarbonate pressure screws firmly hold the polycarbonate lens in place
- Wall, ceiling or end mounting configurations are available
- Ceiling and end mount versions come complete with a factory installed weatherproof steel canopy
- Single or double face models to order
- External LED status indicator and test switch(em models) are provided
- The NEMA 4X housing is fully gasketed for damp and wet locations with a hot-bonded silicone gasket

Electrical


- NEX-NYC EM battery model features a free, sealed Nickel Cadmium battery providing a minimum emergency duration of 90 minutes
- An optional 120 minute Nickel-Cadmium battery is available
- Recharge time of the battery is forty-eight (48) hours
- Operating temperature is 10° to 40°C
- Optional internal heater to -20°C
- 120/277V selectable input
- Consumes only 2W nominal power

Illumination

- Long life high intensity Red LED's provide the required illumination
- 8" letters meet New York City requirements
- Field selectable directional chevron indicators

SINGLE FACE

DOUBLE FACE

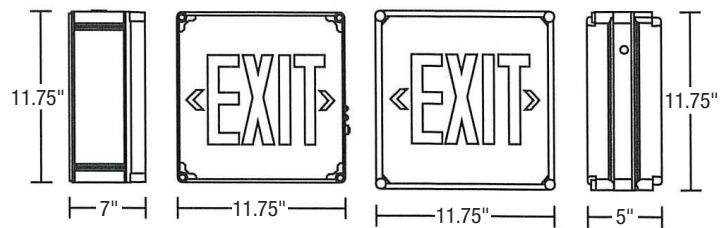

Certification

- Listed to UL 924
- The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments
- California Energy Commission (CEC) Title 20 Compliant



Warranty

- 3 Year Limited Warranty

Note: It is the installer's responsibility to ensure the water tight integrity of the housing for any holes drilled for conduit entry

ORDERING GUIDE - NEX-NYC

Example: NEX-NYC-EM-1-1B-SD

Model	Operation	Number of Faces	Mounting	Options
NEX-NYC	AC AC Only 120/277V	1 Single	1B Wall Mount, No Canopy T Top Ceiling Mount Canopy LE Left End with Canopy RE Right End with Canopy	SD Self-Test/Self-Diagnostic (EM Models Only) BZ Audible Alarm Buzzer F Flash in Emergency Mode 2H 2 Hour Run Time DK Dual Circuit available in AC only H Internal Heater -20°C CW Custom Wording (consult factory)
	EM Battery Backup Emergency 120/277V	2 Double		
NEX-NYC				

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number: