

PROJECT NAME:	APPROVED BY:
CATALOG NO:	TYPE NO:

TELESIS NXRH - REMOTE HEAD

LED NEMA4X/NSF

Telesis TCRH emergency lighting units are designed for use in IP66 and NEMA 4X wet locations. The corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens provides added protection. Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

Construction

- Universal knockout pattern on back provided with gasket for watertight seal for back mount
- Distance of maximum run is determined by system voltage, wire gauge, and total maximum wattage on the run
- Suitable for wall or ceiling mount
- Housing is reinforced polycarbonate construction in white or black finish
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws

Electrical



- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing
- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided)
- 176 Lumens per Lamphead

Certification

- UL listed
- IP66 rated for Ingress protection
- NEMA4X and NSF rated
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL certified for use in food service operations
- Buy American Act compliant

Warranty

- Five Year Limited Warranty

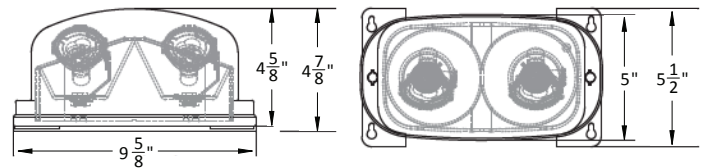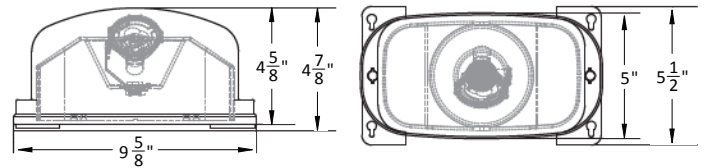

ORDERING GUIDE – NXRH

Example: NXRH-1-W-TP

Model	Heads	Housing Color	Options
NXRH	1 Single 2 Double	W White B Black	TP Tamper-proof
NXRH			

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number:

NXRH - 7/16/24