

PROJECT NAME:	APPROVED BY:
CATALOG NO:	TYPE NO:

TELESIS - LED Exit Signs

LED Exit/Combo With Linear Directional LED

Telesis LED exit signs feature a unique combination exit/emergency light with a linear LED array housed in an adjustable highly reflective metallized reflector, with a polycarbonate spread lens for maximum performance. Mounting the linear LED array on the bottom of the sign provides for a compact high performance exit/emergency light combination. Long life LED light sources in an attractive, and economical tough ABS housing. Super bright, energy efficient white led's provide the minimum required 90 minutes of emergency lighting.



Construction

- Specular reflector and linear White LED array with polycarbonate diffuser lens
- Injection Molded 5VA flame retardant, high impact thermoplastic housing in a White or Black finish
- Universal mounting canopy included for end wall or ceiling mounting, single or double face
- Snap Together, Quick Fit Installation with Field Selectable Chevron Directional Indicators
- Long Life, High Intensity LED Array available in Red or Green letters with 6" height and 3/4" stroke

Electrical

- Field Selectable 120 or 277 VAC input
- Damp location listed standard
- Available with a full self-test / self-diagnostic option
- Solid state transfer relay for reliability
- Electronic Control Circuit and Isolation Transformer provide current control and circuit protection ensuring optimum LED efficiency and life
- Two Nickel Cadmium Batteries provide 90 minute emergency run time
- Operating temperature range 0°C to 50°C

- Dual rate charger recharges the battery in 24 hours
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge
- Line-latch prevents unnecessary discharge of battery during installation
- Integral AC Present Indicator and Push to Test Switch

Illumination

- Exceptionally Low Energy Consumption LED light source with 10+ years life expectancy



Certification

- UL 924 listed and meets NFPA 101 Life Safety Code, NFPA 70-NEC, and OSHA requirements, CEC Title 20 Compliant



Warranty

- 3 year limited warranty

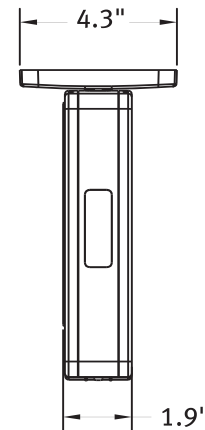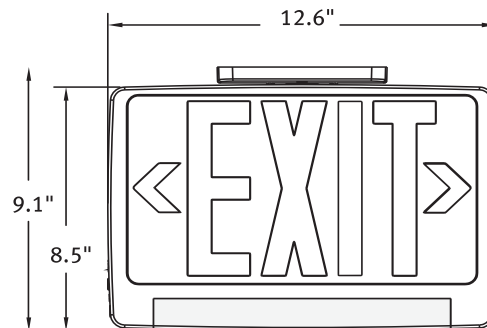

ORDERING GUIDE - TLP

Example: TLP-R-2U-W-SD

Model	Operation	Letter Color	Number of Faces	Housing Color	Options
TLP Telesis LED Exit Sign/LED Combo*	NiCad Battery Back-up 120/277 VAC	R Red LED G Green LED	2U Single/Double Face Universal Mount	W White (Standard) B Black (Standard)	SD Self-Test/Self-Diagnostic M990005 Wire Guard 13.5"H x 15.0"W x 6.0"D
TLP					

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number: