

PROJECT NAME:	APPROVED BY:
CATALOG NO:	TYPE NO:

TELESIS - LED EXIT

LED Exit Sign with ISA

The Telesis TSMA is designed to comply with the State of Massachusetts Building Code requirements, and provide an EXIT sign with a 6" International Symbol of Accessibility.

Classic styling and the convenience of installing one sign makes the TSMA an obvious choice.

Construction

- White power coated 20 gauge steel finish is standard with Black to order
- Universal mounting canopy included for ceiling mounting, or end mounting, single or double face to order
- Universal mounting pattern is stamped into the back plate for easy surface mounting to a j-box
- Matching 6" EXIT sign available, order as TS

Electrical

- Push to test switch and AC present indicator provided on EM models
- Long life Nickel Cadmium maintenance free battery provides the required 90 minutes of emergency operation
- Operating temperature range 10°C to 45°C
- Optional 2 hour battery is available
- Field Selectable 120 or 277 VAC input
- Integral AC Present Indicator and Push to Test Switch
- Solid state transfer relay ensures reliability, no relay contacts to oxidize and fail
- Electronic Control Circuit provides current control and circuit protection ensuring optimum LED efficiency and life

Illumination

- Maintenance free LED light source with low energy consumption <5 watts and long life
- Field selectable chevron directional indicators
- Red or Green LED's with 6" letter and 3/4" stroke and 6" International Symbol of Accessibility



Meets the requirements of the State of Massachusetts

Certification



- CSA-US listed and meets UL 924, Massachusetts Building Code, NFPA 101 Life Safety Code, NFPA 70-NEC and OSHA requirements
- Buy American Act compliant



Warranty

- 3 Year Limited Warranty

1011.2.1.2 Accessible Exits: Where exit signs are required by Section 1011.1 of this code, accessible exit doors at the level of exit discharge that lead directly to the accessible paths of exit discharge shall additionally be marked by the International Symbol of Accessibility. Such symbol shall be not less than 6 inches high and shall be incorporated into the required exit sign or shall be located adjacent to it. Such symbol shall meet the requirements of Section 1011.

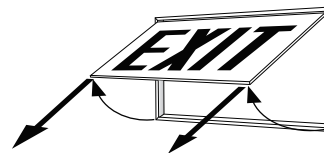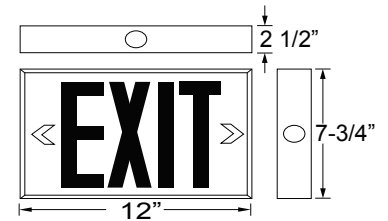

Faceplate slides up and outward for quick and easy installation

ORDERING GUIDE – TSMA

Example: TSMA-EM-R-1-W

Model	Operation	Letter Color	Number of Faces	Housing Color	Options
TSMA Telesis LED Exit/ with 6" ISA TS* Matching 6" Exit only * See data sheet TS	AC AC only operation 120/277 VAC EM NiCad Battery Backup	R Red LED G Green LED	1 Single Face with Canopy 2 Double Face with Canopy	W White (Standard)	B Black Face and Housing 2H Two Hour Emergency Operation WG70 Wire Guard for TSMA 19.5" X 13" X 4.5" TSWG 16.5" x 14" x 3" TP Tamper Proof Screws
TSMA					

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number:

TSMA - 6/25/24