

TUFFLITE NX NEMA 4X Wet Location Emergency Light



Tufflite NX provides an economical solution for Hostile or Wet location applications. Corrosion resistant UV stabilized ABS housing is ideal for Indoor or Outdoor wet locations and is resistant to corrosive atmospheres, non-hazardous dust environments and splashing or spraying water.

Features

- Wet and damp location listed to UL 924
- Suitable for use in temperature range of 32°F to 104°F
- Fully automatic operation
- Two fully adjustable 6 volt 7.2 watt gasket sealed PAR 36 style lamp heads are standard. 9 watt lamps are available as an option
- Remote capacity available as standard up to 12 watts for 6 volt remote loads or provides extended run time
- Corrosion resistant UV stabilized ABS thermoplastic housing in light gray finish
- External mounting brackets. Unit suitable for back mounting only and requires side entry wiring
- Hinged door access
- Maintenance free sealed lead calcium batteries
- Listed to UL 924
- 3 Year limited warranty

Construction


- Field selectable 120 or 277 VAC input
- Sealed external Momentary test switch and AC status indicator
- Constant voltage solid state charging circuit
- Line-latch prevents unnecessary discharge of battery during installation, loads will not illuminate until after application of utility power
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge
- Brownout sensing assures emergency operation during periods of low line voltage
- Damp location environmentally coated circuitry



TUFFLITE NX

NEMA 4X
Wet Location
Emergency Light

Sheet 48.0

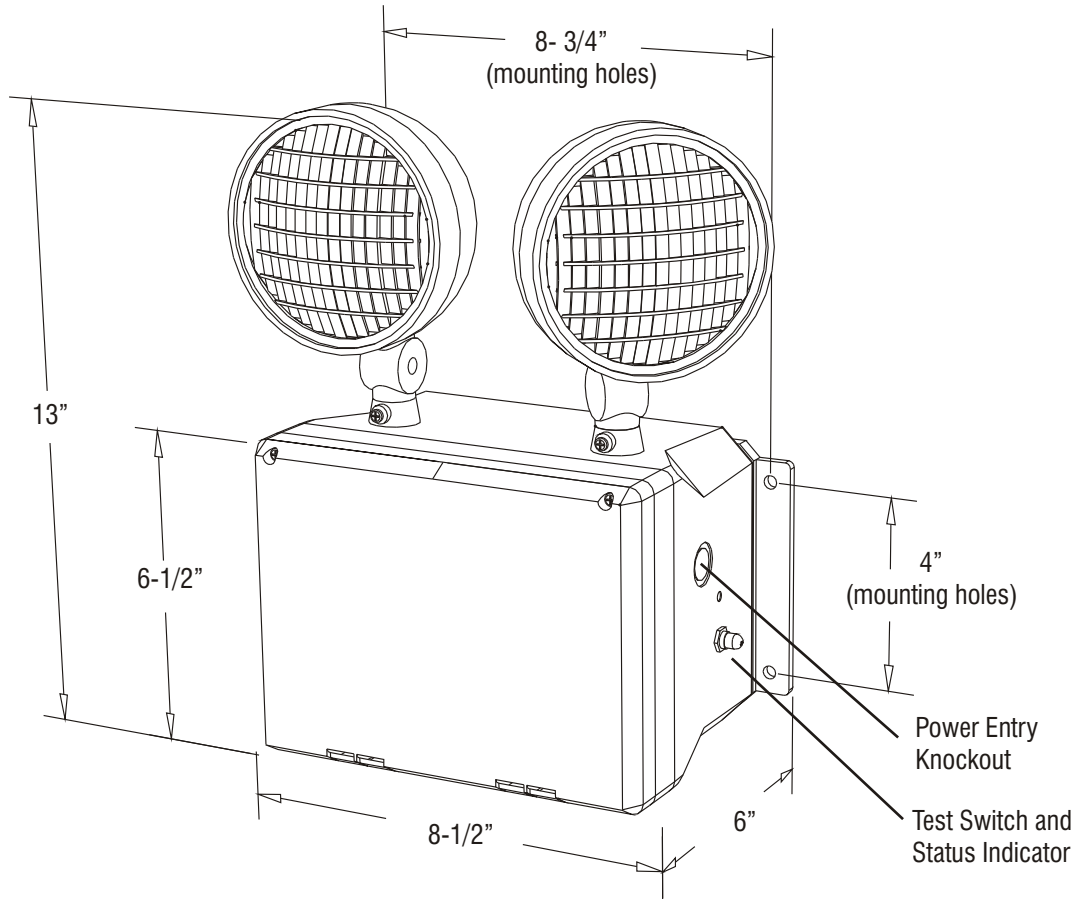

TUFFLITE NX Ordering Guide

NX2E27 - TD

Model	
NX2E27	6 volt 27 watt 90 minute capacity

Options	
TD	15 minute Time Delay
L110011	9 watt Lamps
WG5	Wire Guard

Project Name:	Approved By:
Catalog No:	Type No: